




# IMAGECARE-320

Quick heated speed laminator ready to laminate in 45 second.



World Wide Patent Applied AOL System (Anti Opposite Loading System)

## Anti Opposite Loading System for IMAGECARE-320

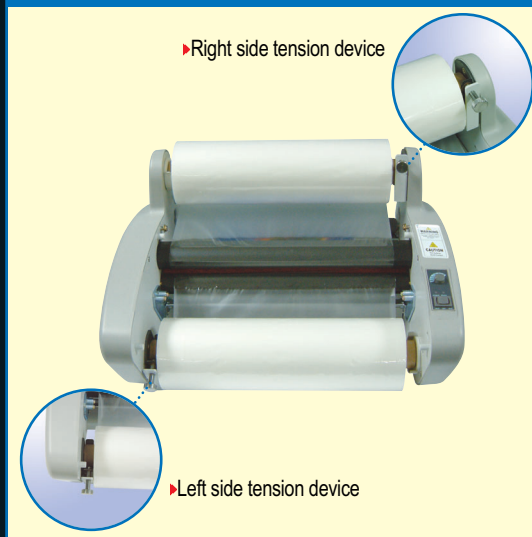

▶ This Anti Opposite Loading System is the first in the laminating industry in the world and we have obtained Patent from the authorities to keep all rights reserved.

## IMAGECARE-320

- ◆ Cost-Effective, High Performance, Simple Desktop Roll Laminator
- ◆ Easy roll film Installation and no tension control required
- ◆ Laminating Speed (1m/min)
- ◆ Easy to use and compact design
- ◆ Quick warm-up time using Ruthenox heating

### Specifications

Model Name	IMAGECARE-320
Laminating Speed	1m/min
Laminating Width	320mm
Laminating Films	25mic~250mic
Thickness of substrate(Paper)	80g/㎡ ~ 250g/㎡
Power Requirements	220~240V, 50/60Hz
Power Consumption	600W, 2.7A
Warm Up Time	45 second
Heating System	Heatshoe Ruthenox Heater
Operating Temperature	130 ℃ Max.
Speed Control	Fixed
Temperature Control	Knob & Volume
Pressure Adjustment	Manual
Film Core	Plastic (AOL System)
Dimensions(WxLxH)	445 x 367 x 670mm
Type of Main Motor	Shading Pole Geared Motor t30

GMP reserves the right to after change specifications without prior notice.



ISO 9001:2000 CERTIFICATE



CERTIFICATE NUMBER: RM0807



**GMP CO., LTD.**  
www.gmp.com

# IMAGECARE-320


Ready to use with in 45 seconds, highly efficient using GMP's ultra low melting film.

## Package Offer


GMP Patent Ruthenox heating technology  
Automatic temperature control



IMAGECARE-320



OFFICE LAMITRIM-46



ROUND CORNER CUTTER

World Patented PHOTONEX UV Film  
Canvas texture and Sparkler film for photograph  
PERFEX FILM (PET FILM) Gloss and Matt Film



FILM

**\* One-Stop solution from laminating to display for photo and printed material**

### ▶ IMAGECARE -320

Cost effective, easy to use ultra compact roll laminator for photo studio or laminating shop and office.

### ▶ PHOTONEX UV HOT FILM - Photograph, Mouse Pad, Menus, Oil Painting image frame

- CANVAS TEXTURE (200mic-CA30m)

- SPARKLER (115mic-CA50m)

GMP's patent PHOTONEX film for UV protection stand out canvas texture.

High quality film with a cubic effect, oil painting effect for photo and picture laminating.

### ▶ PERFEX FILM - Polyester laminating film for school, kindergarten, laminating shop

- GLOSS (38mic-CA150m, 75mic-CA75m, 125mic-CA50m, 250mic-CA30m)

- MATT (38mic-CA150m, 75mic-CA75m, 125mic-CA50m, 250mic-CA30m)

Low temperature, high quality PET laminating film which is based on GMP's best Co-Extrusion film technology.

### ▶ OFFICE LAMI TRIM-46

Easily trims finished laminated materials.

### ▶ ROUND CORNER CUTTER

Soft corner cutter for laminated or unlaminated materials.

## Laminating Film for IMAGECARE-320

ITEM	THICKNESS(mic)	WIDTH(mm)	LENGTH(mm)	ITEM	THICKNESS(mic)	WIDTH(mm)	LENGTH(mm)
PERFEX-GLOSS	38	305	CA150	PERFEX-MATT	38	305	CA150
PERFEX-GLOSS	75	305	CA75	PERFEX-MATT	75	305	CA75
PERFEX-GLOSS	125	305	CA50	PERFEX-MATT	125	305	CA50
PERFEX-GLOSS	250	305	CA30	PERFEX-MATT	250	305	CA30
PHOTONEX SPARKLER	115	305	CA50	PHOTONEX CANVAS	200	305	CA30

\*CA is film attached tension complement core adaptor.